


FEATURES

- | For up to 3,250 gal. of total sprinkler pipe capacity
- | UL 508A listed Industrial Control Panel
- | FM1035 approved
- | Dual-Bed PSA technology
- | BlastOff™ I - Leak Detection System
- | BlastOff II - Auto Air Bypass Alarm
- | Requires separate feed air compressor
- | Integrated Air Dryer and N₂ receiver tank
- | Touchscreen/HMI with Smart-Trak™ technology
- | Optional BlastOff III – Early Warning System
- | Optional BlastOff IV – Onboard Purity Alarm

UNIT DETAILS

| N ₂ Blast FPS-3250 | |
|--|---|
| Part Number | |
| N ₂ Generation System | FPS-03250 |
| AutoPurge System [®] | A03-APS2 |
| Air Compressor Package (3HP, 5HP, 7.5HP, 7.5HD HP, 10HP) | STS-NF-C- (3-CS, 5-CS, 7-CS, 7HD-CS, 10-CS) |
| Dimensions | |
| A (Width) | 26.0" |
| B (Depth) | 18.06" |
| C (Height) | 67.5" |
| Unit Weight | 243 lbs. |
| Tank Dimensions/Weight | Integrated |
| Unit Details | |
| Max FPS Capacity | 3,250 Gallons |
| Nitrogen Purity | 98% + |
| Mount | Floor |
| Electrical | 110 VAC / 5 Amp / 1 Phase |
| Maintenance | Annual or 1,000 Hours ¹ |
| Warranty | One Year ² |

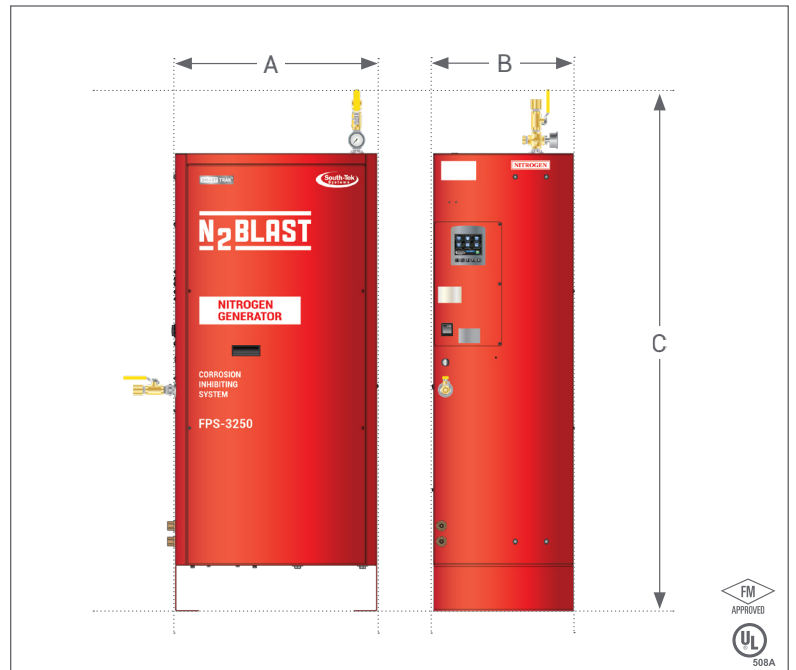

1. Whichever comes first per STS terms and conditions.
2. Extended warranty options available.

OPTIONAL EQUIPMENT

| Part Number | Product Description |
|--------------------------------------|--|
| B20-A-002X | BlastOff III - Early Warning System |
| A02-MO2-4C | BlastOff IV - Onboard Purity Alarm |
| A02-QCP | Quick-Check [®] Portable N ₂ Purity Sensor |
| A02-QCF (PST or 6PST) | N ₂ Blast AutoPurge System 1 or 6 Zone Timer |
| A02-QCF-PS (1PM, 6PM, 10PM, or 20PM) | Quick-Check Single or Multi-Zone Purity Manifold |
| PM Box-004 | Preventative Maintenance Box (2 years of Annual Filter Kits) |